

# 2/4 Megapixel H.265 IR Mini Dome Network Camera





MS-C2982-PB/MS-C4482-PB



## KEY FEATURES

- 0.002Lux Starlight
- Super WDR up to 140dB
- H.265 High Efficiency Video Coding
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion Detection
- Micro SD/SDHC/SDXC card local storage support
- Built-in efficient IR LEDs, IR distance up to 15m
- Built-in 802.3af Compliant PoE
- Built-in Microphone
- Support ONVIF Profile S

## DIMENSIONS (mm)

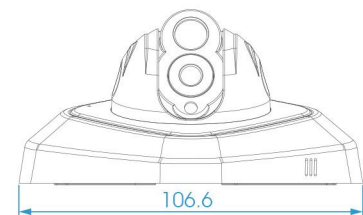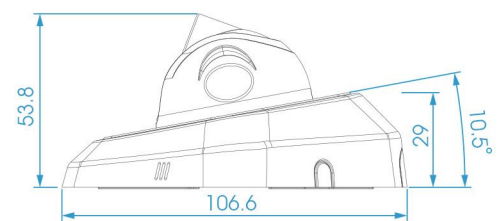

## SUPPORTED BROWSERS





	Model	MS-C2982-PB (2.0MP)	MS-C4482-PB (4.0MP)	
Camera	Image Sensor	1/2.8" Progressive Scan CMOS	1/3" Progressive Scan CMOS	
	Min. Illumination	Color: 0.002Lux @F1.2 B/W: 0Lux with IR on	Color: 0.008Lux @F1.2 B/W: 0Lux with IR on	
	WDR	Super WDR up to 140dB	Super WDR up to 120dB	
	Lens	3.6mm/2.8mm/6mm @F1.6		
	Mount	M12		
	Field of View	H67.2°(3.6mm)		
	Shutter Time	1/100000s~1/5s		
	IR Distance	Up to 15m		
	Day&Night	ICR Filter Auto Switch		
	Video	Max Image Resolution	1920x1080	2592x1520
Frame Rate		30fps(1920x1080), 30fps(1280x960), 30fps(1280x720), 30fps(704x576)	20fps(2592x1520), 30fps(2304x1296), 30fps(1920x1080), 30fps(1280x960), 30fps(1280x720), 30fps(704x576)	
Video Compression		H.265(HEVC)/H.264/MJPEG		
Video Bit Rate		16Kbps~16Mbps(CBR/VBR Adjustable)		
Image Setting		Brightness/Contrast/Saturation/Sharpness		
Network	Ethernet	1*RJ45 10M/100M Ethernet Port		
	Network Storage	NAS(Support NFS, SMB/CIFS)		
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN		
Audio	Audio Streaming	Built-in Microphone		
	Audio Compression	G.711/AAC		
System	Storage	Support Micro SD/SDHC/SDXC Local Storage, up to 64G		
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR, ROI		
	SIP/VoIP Support	Yes, Voice & Video-over-IP		
	Event Trigger	Motion Detection, Network Disconnection, Audio Trigger, etc.		
	Event Action	FTP Upload/ SMTP Upload/ SD Card Record/ SIP Phone		
	System Compatibility	ONVIF Profile S		
General	Working Temperature	-30°C~60°C		
	Working Humidity	0~90%(Non-condensing)		
	Power Supply	PoE		
	Power Consumption	3.5W MAX	4W MAX	
		5W MAX (with IR on)	5.5W MAX (with IR on)	
	Weight	150g		
	Dimensions	106.6mmX106.6mmX53.8mm		
	Warranty	2 Years		

Note: MS-C2982-PB, P refers to PoE, B refers to H.265

V6.10

Milesight Technology Co.,Ltd. | [www.milesight.com](http://www.milesight.com)



Add: No.23 Wanghai Road, 2nd Software Park, Xiamen, China  
Tel: +86-592-5922772 Mail: [sales@milesight.com](mailto:sales@milesight.com)

