



Model	DiGiEyes DE-IP228-PF (2.8)	
Camera	Image Sensor	1/2.8" Progressive Scan CMOS
	Min. Illumination	Color: 0.002Lux@F1.2 B/W: 0Lux with IR on
	WDR	140dB Super WDR
	Lens	2.8mm @F2.0 / 3.2mm @F2.2 / 3.6mm @F2.2
	Mount	M12
	Field of View	H123°/D142°/V68°(2.8mm) H108°/D126°/V59°(3.2mm) H90°/D105°/V48°(3.6mm)
	Shutter Time	1/100000s~1s
	IR Distance	Up to 25m
	Day&Night	ICR Filter Auto Switch
	S/N	>55dB
	Video	Max. Image Resolution
Primary Stream		30fps@(1920x1080, 1280x960, 1280x720, 704x576)
Secondary Stream		30fps@(704x576, 640x480, 640x360, 352x288, 320x240, 320x192, 320x180)
Tertiary Stream		30fps@(1920x1080, 1280x720, 704x576, 640x480, 640x360, 320x240, 320x192, 320x180)
Video Compression		H.265+/H.265(HEVC)/H.264+/H.264/MJPEG
Video Bit Rate		16Kbps~16Mbps(CBR/VBR Adjustable)
Image Setting		Brightness/Contrast/Saturation/Sharpness
Network	Ethernet	1*RJ45 10M/100M Ethernet Port
	Network Storage	NAS(Support NFS, SMB/CIFS)
	Protocol	IPv4/IPv6, ARP, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, Bonjour, SIP, PPPoE, VLAN, 802.1x, QoS, IGMP, ICMP, SSL
Audio	Audio Compression	G.711/AAC/G.722/G.726
	Audio Interface	Built-in Microphone
System	Storage	Support microSD/SDHC/SDXC Card Local Storage, up to 256G
	Advanced Function	Privacy Masking, BLC, HLC, 2D DNR, 3D DNR, ROI, Defog, AWB, EIS, IP Address Filtering, AGC, Anti-flicker, Corridor Mode, Deblur
	SIP/VoIP Support	Yes, Voice & Video-over-IP
	Event Trigger	Motion Detection, Network Disconnection, Audio Alarm, etc.
	Event Action	FTP Upload, SMTP Upload, SD Card Record, SIP Phone, HTTP Notification, etc.
	Video Analysis (Optional)	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting, Object Left, Object Removed
	System Compatibility	ONVIF Profile S & G & T
General	Working Temperature	-40°C~60°C
	Working Humidity	0~90%(Non-condensing)
	Power Supply	PoE (802.3af)
	Power Consumption	2.5W MAX 4W MAX (With IR on)
	Housing	Vandal-proof IK10-rated Metal Housing / Up to IP67-rated for Weather-resistant Performance
	Weight	600g (Junction Box Version) / 410g (Cable Out Version)
	Dimensions	Φ108mmX96.5mm (Junction Box Version) / Φ106mmX76.5mm (Cable Out Version)
	Warranty	3/5 Years

Structure Diagrams

Junction Box Version

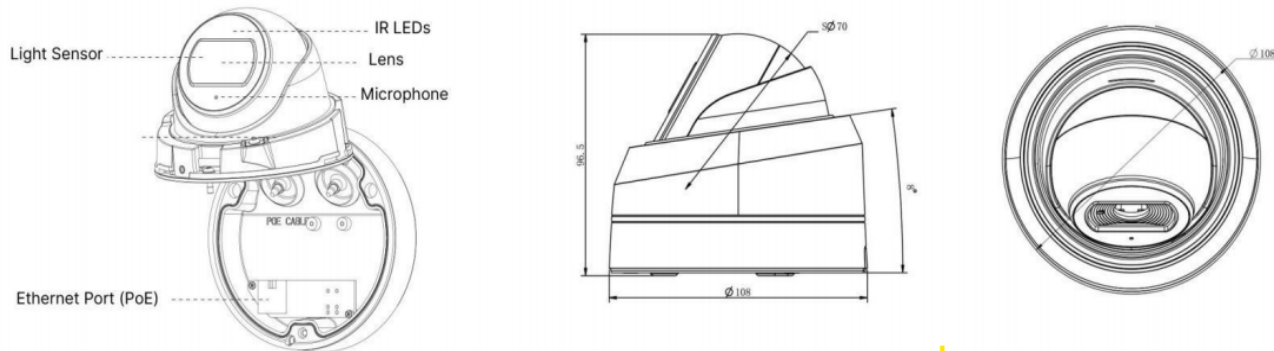

Cable Out Version

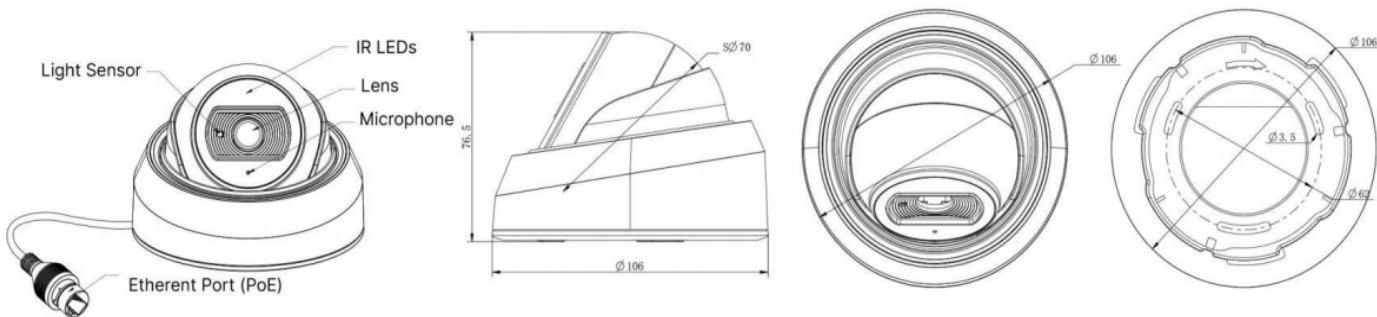

Units: mm

Accessories Support

A01 Pole Mount

 Weight: 720g
 Dimensions: 170*51.5*152.6mm

A03 External Corner Bracket

 Weight: 900g
 Dimensions: 170*152.5*76.3mm

A71 Wall Mount

 Weight: 530g
 Dimensions: 162*124*78 mm

A81 Recessed Mount

 Weight: 450g
 Dimensions: 168.9*168.9*91.3mm

A83 Junction Box

 Weight: 270g
 Dimensions: φ122*45.5mm
