


2/3/4 Megapixel H.265 Day&Night Pro Box Network Camera





MS-C2951-PB/MS-C3751-PB/MS-C4451-PB



KEY FEATURES

- 0.002Lux Starlight
- Super WDR up to 140dB
- H.265 High Efficiency Video Coding
- Built-in ICR Filter for Day/Night switching
- Built-in web server for IE/Firefox/Chrome/Safari preview
- 3D-DNR, Privacy Masking and Motion Detection
- I/O Interface, FTP Upload, Email Alert for Alarm Processing
- RS485 Interface for PTZ Camera Control
- Micro SD/SDHC/SDXC card local storage support
- Built-in 802.3af Compliant PoE
- Support ONVIF Profile S

DIMENSIONS (mm)

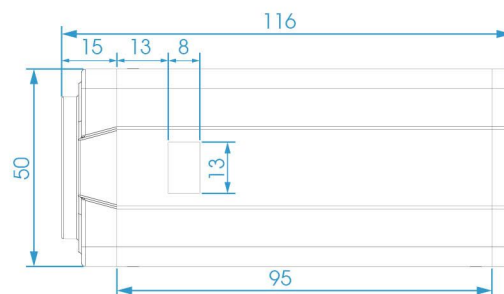

SUPPORTED BROWSERS





	Model	MS-C2951-PB (2.0MP)	MS-C3751-PB (3.0MP)	MS-C4451-PB (4.0MP)
Camera	Image Sensor	1/2.8'' Progressive Scan CMOS		1/3'' Progressive Scan CMOS
	Min. Illumination	Color: 0.002Lux @F1.2 B/W: 0.001Lux	Color: 0.005Lux @F1.2 B/W: 0.002Lux	Color: 0.008Lux @F1.2 B/W: 0.004Lux
	WDR	Super WDR up to 140dB	Super WDR up to 120dB	
	Mount	C/CS		
	Shutter time	1/100000s~1/5s		
	Day &Night	ICR Filter Auto Switch		
	Video	Max Image Resolution	1920×1080	2048×1536
Frame Rate		30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	30fps(2048×1536), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)	20fps(2592×1520), 30fps(2304×1296), 30fps(1920×1080), 30fps(1280×960), 30fps(1280×720), 30fps(704×576)
Video Compression		H.265(HEVC)/H.264/MJPEG		
Video Bit Rate		16Kbps~16Mbps(CBR/VBR Adjustable)		
Image Setting		Brightness/Contrast/Saturation/Sharpness		
Network		Ethernet	1*RJ45 10M/100M Ethernet Port	
	Network Storage	NAS(Support NFS, SMB/CIFS)		
	Protocol	TCP/IP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, FTP, NTP, SMTP, SNMP, UPnP, SIP, IPv6, PPPoE, VLAN		
Audio	Audio Compression	G.711/AAC		
	Audio I/O	1/1		
System	Alarm I/O	1/1		
	Storage	Support SD/SDHC/SDXC Local Storage, up to 64G		
	Advanced Function	Motion Detection, Privacy Masking, Backlight Compensation, 3D-DNR,ROI		
	SIP/VoIP Support	Yes, Voice & Video-over-IP		
	Event Trigger	Motion Detection, Network Disconnection, Audio Trigger, etc.		
	Event Action	FTP Upload/ SMTP Upload/ SD Card Record/ External Output/ SIP Phone		
	System Compatibility	ONVIF Profile S		
	General	Working Temperature	-30℃~60℃	
Working Humidity		0~90%(Non-condensing)		
Power Supply		PoE/ DC12V±10%		
Power Consumption		2.5W MAX	3W MAX	2.5W MAX
Weight		375g		
Dimensions		116mmX60mmX50mm		
Warranty		2 Years		

Note: MS-C2951-PB, P refers to PoE, B refers to H.265

V6.10

