AVerMedia[®] AVerDiGi SA9000E Pro

Pioneering the most cutting edge HYBRID DVR




16-CH D1 Real-Time recording

- Supports MegaPixel, IP & Analog PTZ/camera
- **IP & Analog TV-Output**
- HYBRID Spot-Monitor & Dual-Monitor output
- Instant playback from facial detection
- **POS integration and advanced POSViewer**
- Remote Integration: CMS, Remote Console, WebViewer, PDAViewer and JavaViewer, etc.
- Supports System Controller(3-axis joystick keyboard)

curity Syst

System Application

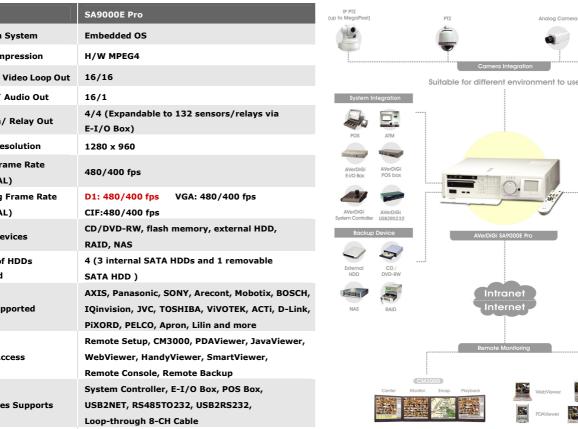

Product Illustration Product Photo Removable SATA HDD Tra (Black Series) 0000000 (Front View) (Rear View) Ethernet Port o Loop Out ※ Optional for Rack Ears Multifunctional Camera Control Jog Shuttle Audio Out X

CEFCC W All right reserved. No part of this document may be reproduced, stored in a retrieval system, or transmitted in any form or by any means (Electro photocopy, recording, or otherwise) without the written permission of AVerMedia. Information in this document is subject to change without notice. The information contained herein, is to be considered for informational purposes only and shall not be considered legally binding. 2007 by AVERMEDIA TECHNOLOGIES, Inc. All rights reserved. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system, or translated into any language in any form by any means without the written permission of AVERMEDIA TECHNOLOGIES, Inc. AVerMedia is registered trademarks of AVerMedia Technologies, Inc. All other trademarks belong

to their respective companies. Made in Taiwan. 2007/12/24

AVerMedia° www.averdigi.com www.avermedia.com

Specifications

•	
Model	SA9000E Pro
Operation System	Embedded OS
Video Compression	H/W MPEG4
Video In/ Video Loop Out	16/16
Audio In/ Audio Out	16/1
Sensor In/ Relay Out	4/4 (Expandable to 132 sensors/relays via E-I/O Box)
Display Resolution	1280 x 960
Display Frame Rate (NTSC/PAL)	480/400 fps
Recording Frame Rate (NTSC/PAL)	D1: 480/400 fps VGA: 480/400 fps CIF:480/400 fps
Backup Devices	CD/DVD-RW, flash memory, external HDD, RAID, NAS
Number of HDDs supported	4 (3 internal SATA HDDs and 1 removable SATA HDD)
IPcam Supported	AXIS, Panasonic, SONY, Arecont, Mobotix, BOSCH, IQinvision, JVC, TOSHIBA, ViVOTEK, ACTi, D-Link, PiXORD, PELCO, Apron, Lilin and more
Remote Access	Remote Setup, CM3000, PDAViewer, JavaViewer, WebViewer, HandyViewer, SmartViewer, Remote Console, Remote Backup
Accessories Supports	System Controller, E-I/O Box, POS Box, USB2NET, RS485TO232, USB2RS232, Loop-through 8-CH Cable
Dimensions (W x H x D)	431 x 110 x 410